


WL-03
SLIM OUTDOOR WALL SCONCE

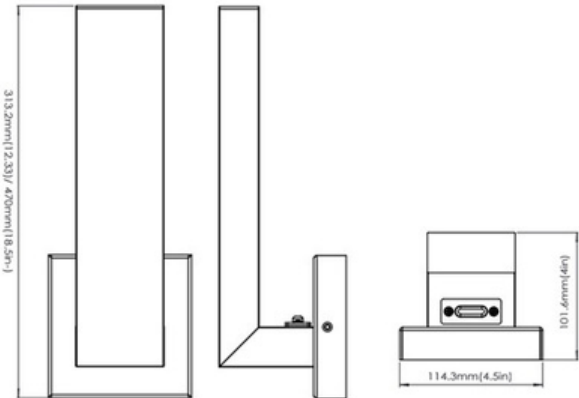

SPECIFICATIONS

| | |
|-------------------------|----------------------|
| CCT | 27/30/35/40/50K |
| BEAM ANGLE | 110° |
| SDCM | SDCM≥7 |
| COLOR RENDERING INDEX | RA≥80 |
| WATTAGE | 30W |
| INPUT VOLTAGE | 120VAC |
| LUMENS | 1200lm |
| DIMMING OPTION | TRIAC |
| DIMMING RANGE | 10%~100% |
| LIFE SPAN | 50000H |
| LIGHT SOURCE TYPE | LED |
| NUMBER OF LIGHT SOURCES | 1 |
| MOUNTING TYPE | SURFACE |
| PRODUCT DIMENSIONS | L18.5" x W4.5" x H4" |
| MATERIAL | ALUMINUM, PLASTIC |
| COLOR | BLACK |
| SURFACE PROCESSES | PAINTING |
| NET WEIGHT (PIECE) | 0.98KG |
| IP RATING | IP65 |

DESCRIPTION

The durable aluminum housing of this fixture enables excellent heat dissipation, complemented by a corrosion and heat-resistant powder-coated finish. It offers both single CCT and multiple CCT options for selection, with a 120VAC input. The installation process is quick and simple, allowing surface mounting to most junction boxes. Additionally, it is reliable in any weather conditions, boasting an IP65 weatherproof rating, and is cETLus listed for wet locations, ensuring its suitability for various outdoor environments.